


2201 DC Battery Selector & 2202 DC Meter Panel

2201 DC Battery Selector Panel and 2202 DC Meter Panel

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 Interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers. UL recognized (UL-1077)
- Voltage: 12V is the standard voltage, 24V and 32V are OPTIONAL
- Color: Black is standard. Optional: White, Gray and Beige.
- Main Breaker: 50AMPS is standard, 60, 80 or 100 AMP breakers are optional. DC mains are large frame breakers providing a 3000 AMP interrupt capacity in compliance with ABYC Standard E9.11 for battery banks with a total Cold Cranking Ampere (CCA) rating up to 1100. They require no back-up fuse.
- Battery Select Switch: This ignition protected switch provides connection between two battery banks and has a Marine UL listed rating of 250 AMPS continuous up to 50VDC.
- Dimensions: 5 1/2" x 8 1/4"H x 3" D.

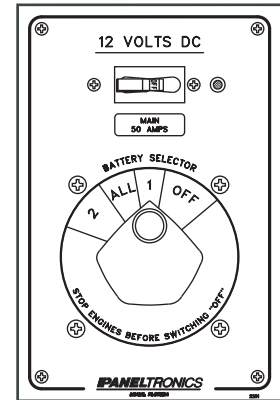


4317

2202 DC Meter Panel

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 Interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Hydraulic/magnetic, trip free Circuit Breakers. UL recognized (UL-1077)
- Voltage: 12V is the standard voltage, 24V and 32V are OPTIONAL
- Color: Black is standard. Optional: White, Gray and Beige.
- Battery Test: Monitor two battery banks with Euro-style rocker switch
- Metering: 8-16VDC expanded scale Voltmeter and 0-50 DCA Ammeter standard. Other scales and digital meters are optional
- Dimensions: 5 1/2" W x 8 1/4" H x 2 1/4"D.

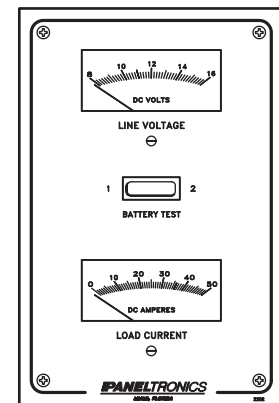

4318