


2301 & 2302 AC Generator/Shore Source Selector Panels

2301 AC Generator/Shore Source Selector Panel (Single Shore Cord) 120 VAC 60 HZ, (or 240 VAC 50 HZ)

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Voltage: 30 AMPS (shore), 50 AMPS (Gen.), 120 VAC, 60 HZ (2 Pole) is standard. 16 AMPS (Shore), 50 AMPS (Gen.), 240 VAC, 50 HZ (2 Pole) optional.
- Generator Controls: Rocker switches for preheat and start/stop.
- Dimensions: 5 1/2" W X 8 1/4" H X 2 5/8 D.
- Color: Black is standard. Optional: White, Gray and Beige.

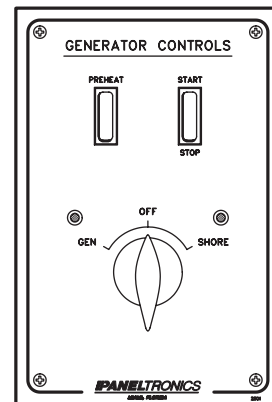

2302 AC Generator/Shore Source Selector Panel (Single Shore Cord) 240 VAC 60 HZ

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Voltage: 50 AMPS (Shore), 60 AMPS (Generator) 240 VAC-60 HZ (3 Pole) USA is Standard.
- Generator Controls: Rocker switches for preheat and start/stop.
- Dimensions: 5 1/2 " W X 8 1/4 " H X 4 5/8 " D.
- Color: Black is standard. Optional: White, Gray and Beige.

